



ULTRA HIGH PRESSURE PTO Drop-In

PRODUCT SPECIFICATION

Hydrus™ Integrated Systems are designed for installation on larger apparatus that has conventional flows using the same water and foam sources. These units are ideal for fuel fires, as well as dumpster, car and structure fires. These self-contained systems incorporate a state-of-the-art UHP fire suppression system and can be powered using a PTO pump from the truck.

PRODUCT SPECIFICATIONS

| | 10 GPM GAS | 20 GPM GAS |
|------------------------|-----------------------|-----------------------|
| Flow | 10 GPM (38 LPM) | 20 GPM (76 LPM) |
| Pump Pressure | 1450 PSI (100 bar) | 1450 PSI (100 bar) |
| Nozzle Pressure | 1250 PSI (86 bar) | 1250 PSI (86 bar) |
| Weight (pump) | **** lbs (** kg) | **** lbs (** kg) |
| Height | 21.75 in. (55.25 cm) | 21.75 in. (55.25 cm) |
| Width | 25.35 in. (64.39 cm) | 25.35 in. (64.39 cm) |
| Depth | 25.875 in. (65.72 cm) | 25.875 in. (65.72 cm) |

- ### PRODUCT FEATURES
- ✓ Water and Foam Drop-In Unit
 - ✓ Pressure Gauge
 - ✓ 0% - 6% Foam Proportioner
 - ✓ 200' 3/4" UHP Hose
 - ✓ Elkhart Chief UHP Nozzle
 - ✓ Venturi Foam System
 - ✓ 1 Year Limited Warranty
 - ✓ Harrison Hydra-Qube Sr.
 - ✓ PTO Not Provided
 - ✓ 10 GPM Available


Nozzle Options



Elkhart Chief Nozzle




Udor Wildland Nozzle

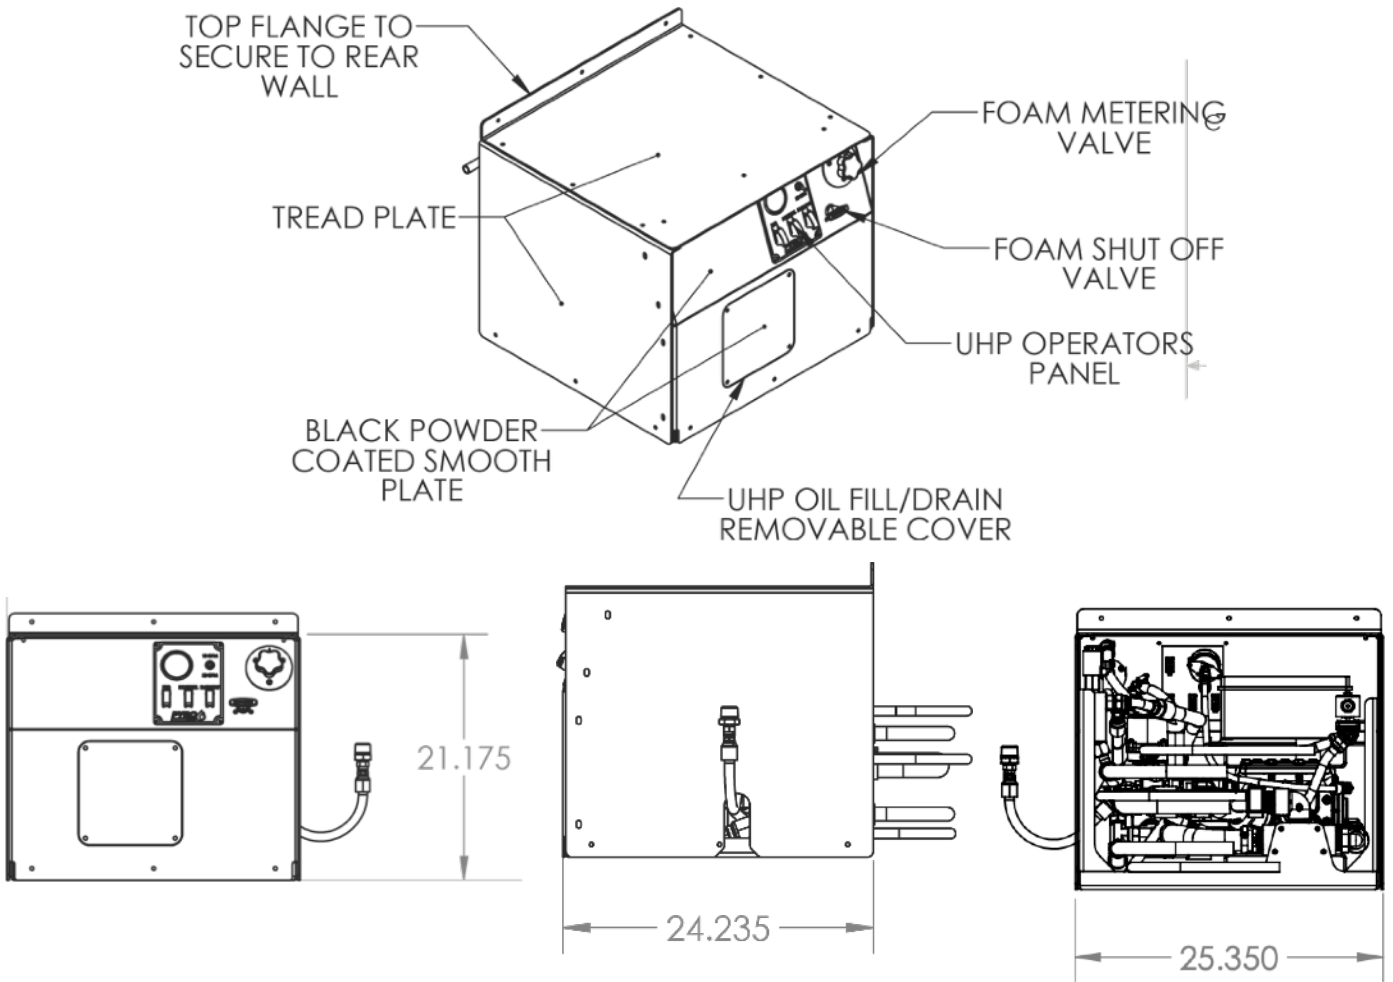

Hydra-Qube SR.

MODEL SHOWN:
 HU20HQ-B-S-S1000-0
 SIDE PORTS
 WITH BOTTOM MOUNTING

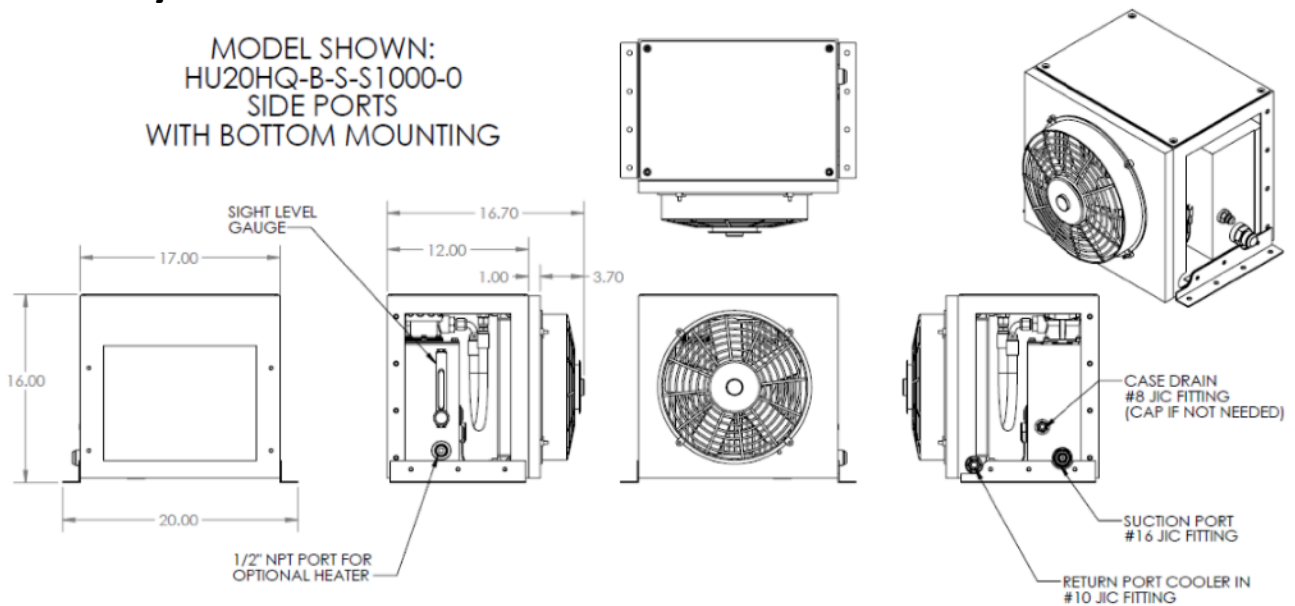

POINT OF CONTACT:
 Matt Cowden
 Director of Sales and Marketing

P: (800) 277-3279
 E: sales@esdfire.com
 W: www.esdfire.com

495 Oak Road
 Ocala, FL,
 United States